

Evolution Canopy

Installation Guide



T.A. Plastic Supplies Limited

Tudhoe Industrial Estate,

Spennymoor

Co. Durham

DL16 6TL

Tel: 01388 814858

Fax: 01388 819534



Prior to installation please ensure the following conditions have been met:

- The host wall and base should be made of a sound construction, suitable for fixing this system into position.
- Base for canopy posts should be of a solid concrete construction.
- Fixings provided must be checked for suitability to your application before proceeding with installation.

We recommend the Canopy is installed by two people due to the size and weight of certain components. If you have any queries or questions please feel free to contact our friendly sales team, we are more than happy to help.

Contact us on: **01388 814858.**

Evolution Canopy Installation Guide

Tools required:

- Power Drill/Drive
- HSS Drill Bits—3mm, 7mm, 8mm
- Masonry Drill Bits— 6mm,8mm
- Silicone Gun
- Spirit Level
- Mallet & Hammer
- Step Ladders

Items supplied:

- Star Drive Bit
- Posi Drive bit
- Silicone/ sealant
- Fixings
- Gutter Grid


Canopy Components:



Glazing Bar



End Bar

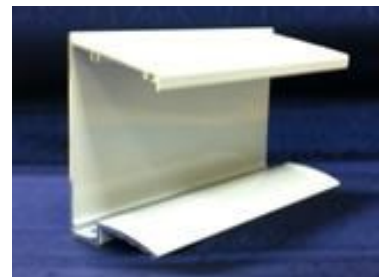


Wall Plate



Eaves Beam/ Gutter



Sheet End Trim

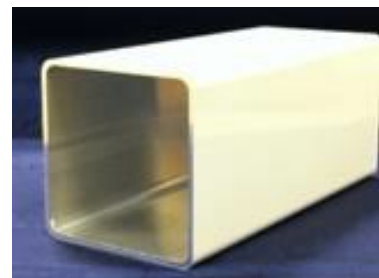

Canopy Post (Leg)

Please ensure all components are present before beginning the installation process.



STEP 1.0: Eaves Beam / Gutter preparation

Apply a bead a silicone sealant to the edge of the eaves beam/Gutter



STEP 1.1: Eaves Beam / Gutter preparation

Fix the end cap of the end of the eaves beam/Gutter using the self tapping screws and cover cap provided. Wipe off excess silicone from outside edge.

NB do not fix screw "x" as this is fitted later.



STEP 1.2: Eaves Beam / Gutter preparation

Once the end caps are fitted, apply another bead of silicone to the inside edge.



STEP 1.3: Eaves Beam / Gutter preparation

Determine and mark the position of the post legs on the underside of the eaves/beam gutter. Select the drainage post/s and drill a central 40mm hole.

NB alternatively a series of small holes can be drilled in a circular pattern to achieve the same result.



STEP 1.4: Eaves Beam / Gutter preparation

To ensure leaves and debris do not block the water outlet, install a small section of gutter grid as per photo. This can be fixed into position using a small bead of silicone if required.



STEP 1.5: Eaves Beam / Gutter preparation

Once the pilot hole has been drilled permanently fix post/s into position using two self tapping screws per side.

Ensure legs are square to eaves beam before screws are fitted.

STEP 2.0: Wall Plate Preparation

Determine the pitch required using the table provided on **Page 5**.
Then measure and mark the host wall at the correct height.

NB: All measurements shown are the height to underside of the wall plate

NB: The dimensions are for standard 2.25mtr posts. For 3mtr posts add 750mm to the dimensions.

STEP 2.1: Wall Plate Preparation

Using a 7mm HSS drill bit pre-drill the wall plate 100mm from the edge.
Equally space the remaining fixing points along the wall plate and drill.
We recommend minimum one fixing per glazing bar along the wall plate.



STEP 2.2: Wall Plate Preparation

Apply a bead of silicone to the back of wall plate. Offer up the wall plate to the wall, drill and fix the first hole into the wall using the 6mm masonry bit and fixings provided.

NB: Fixings supplies are to be fixed into the brickwork with no plug.
Do not fix into mortar Joint.



STEP 2.3: Wall Plate Preparation

Ensure the wall plate is level and fit remaining fixing and cover caps.
Apply a bead of silicone to the top edge of the wall plate to form a watertight seal.



STEP 3.0: Erecting the Canopy

The two edge bar profiles are to be fixed onto the wall plate and eaves beam using the self tapping screws provided.

Use one screw at either end of the bar at this point to allow movement for squaring up later in the procedure.



STEP 3.1: Erecting the Canopy

The drill guide lines on the underside of the wall plate and eaves beam denote the degree of pitch, reading from the host wall from 5 through to 20 degrees (5 degree wall plate fixing shown opposite)

The correct selection of angle is vital to the installation





STEP 3.2: Erecting the Canopy

Fit the pvc sheet end closure centrally to both ends of the polycarbonate panels.

NB: the printed film on the panels denotes the top sun (outer) side. The perforated foil tape should be at the gutter end of the roof. Closure fitted with drain holes to the underside.



STEP 3.3: Erecting the Canopy

Engage the edge of the first polycarbonate panel into the glazing jaw on the edge bar and push the panel in firmly. Then select a glazing bar and engage the panel into the glazing jaw. Ensure the bar is then fully engaged into the wall plate.

NB: do not secure any of the glazing bars at this point.



STEP 3.4: Erecting the Canopy

Repeat the bar fitting procedure with all remaining panels and glazing bars until one panel remains. Now remove the edge bar to allow access of the last panel and then refit. Structure now needs to be squared up. PVC end closures should be flush to the wall plate. Now secure all glazing bars using two screws at both ends of each bar.



STEP 4.0: Fixing Posts

Once the structure is square, level the posts in both directions using a spirit level. Drill the concrete pad using an 8mm masonry bit and fix post brackets to the concrete base, using the stud anchors supplied.



STEP 4.1: Fixing Posts

Hammer in fixings and tighten with a 13mm spanner. Check fixings are secure for your base.



STEP 4.2: Fixing Posts

Level the gutter by adjusting the post over the foot bracket. Once the desired position is achieved, secure using two screws and caps on either side of the post.


STEP 5.0: Fitting sheet edge trim

Apply a bead of silicone to the leading edge of the pvc sheet and closure at the gutter end of the canopy to ensure it is sealed onto the glazing material.



STEP 5.1: Fitting sheet edge trim

Position the sheets edge trim profile on top of the glazing bar ends, leaving a 10mm gap for water drainage at the end of the sheet. The trim should be fixed down by using screws and caps provided and apply a bead of silicone to where the cap sits onto of the bars. A small amount of sealant on top of each screw head is also recommended.

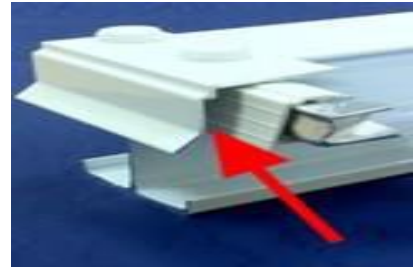

STEP 5.2: Fitting sheet edge trim

Using the screws and caps supplied, use the sight line on the glazing bar to determine the drill position. Use one screw per end and two per glazing bar.



STEP 5.3: Fitting sheet edge trim

Apply a bead of silicone in front of the edge trim over the glazing bar. Fix screw "x" into position (see step 1.1) and fit wall plate end caps.

This now completes the installation of the canopy



Evolution Canopy Installation Guide

Wall plate preparation table:

Pitch (DEG)	Projection	1500mm	2000mm	2500mm	3000mm	3500mm	4000mm
5		2417mm	2460mm	2504mm	2547mm	2591mm	2634mm
10		2542mm	2630m	2717mm	2804mm	2890mm	2977mm
15		2665mm	2795mm	2924mm	3054mm	3183mm	3312mm
20		2784mm	2955mm	3126mm	3297m	3468mm	3639mm

Above table based upon standard 2.25mtr post length and including 20mm for foot brackets.

Add 750mm for 3mtr post upgrade where applicable.

Notes:

Disclaimer:

The manufacturer accepts no responsibility for any injury or consequential losses caused by the use of unsuitable fixings or by installation of the product in any way that differs from that described in this guide. Evolution Canopies are designed to withstand the loading of 600 N/m² which is suitable for most domestic application in the United Kingdom. If you are installing the canopy in an exposed location please call your supplier to ask about increased loading specifications.

T.A. Plastic Supplies Limited

Tudhoe Industrial Estate, Spennymoor, Co. Durham, DL16 6TL

Tel: 01388 814858

Fax: 01388 819534

